


Y M8-M12




Y4F8MF23

Y5MFF

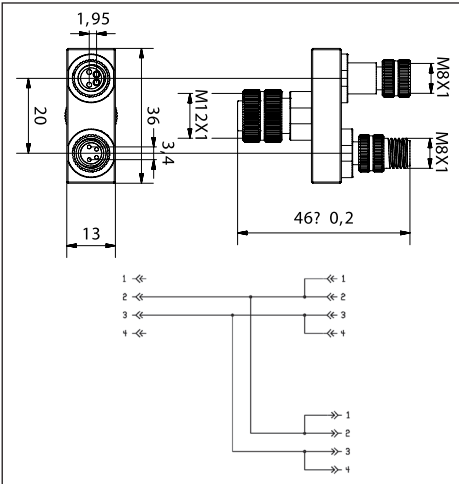

| | |
|---|---|
| Scatola esterna Housing Gehäuse | Resina poliammidica (V0) PA Resin (V0) PA Harz (V0) |
| Contatti Contact material Kontaktmaterial | CuZn (Au) |
| Tensione nominale max: Max voltage Max. Spannung | 60 V AC / 70 V DC |
| Portata max. contatti Max. current Max. Strom | 4 A |
| Grado di protezione Protection class Schutzart | IP67 EN 60529 (DIN 40050) |
| Temp. di funzionamento Working temperature Betriebstemperatur | -25°C / +90°C |
| Ghiera di fissaggio Locking ring Nutmutter | CuZn (Ni) |

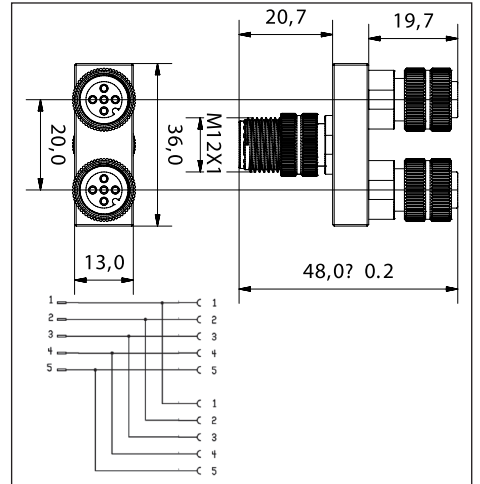

Codici ordine/Codification/Bestellschlüssel

Y4F8MF2/3

Codici ordine/Codification/Bestellschlüssel


Y5MFF

O - Ring **NBR**




Y5MFFAB

Y5FMF

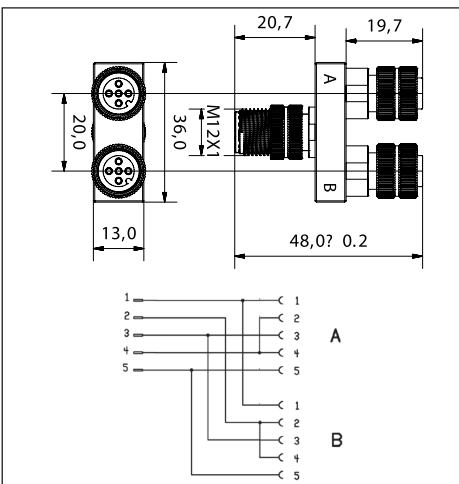

| | |
|---|---|
| Scatola esterna Housing Gehäuse | Resina poliammidica (V0) PA Resin (V0) PA Harz (V0) |
| Contatti Contact material Kontaktmaterial | CuZn (Au) |
| Tensione nominale max: Max voltage Max. Spannung | 60 V AC / 70 V DC |
| Portata max. contatti Max. current Max. Strom | 4 A |
| Grado di protezione Protection class Schutzart | IP67 EN 60529 (DIN 40050) |
| Temp. di funzionamento Working temperature Betriebstemperatur | -25°C / +90°C |
| Ghiera di fissaggio Locking ring Nutmutter | CuZn (Ni) |

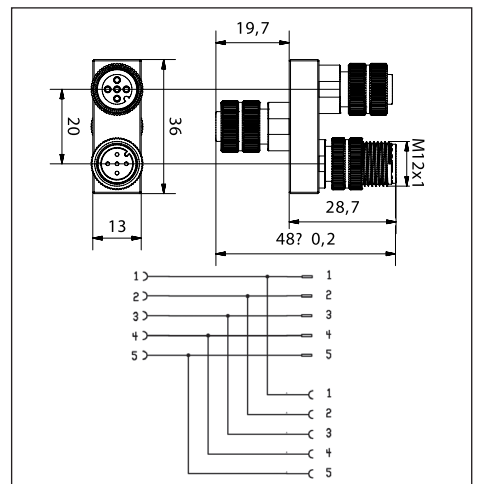

Codici ordine/Codification/Bestellschlüssel

Y5MFFAB

Codici ordine/Codification/Bestellschlüssel

Y5FMF

O - Ring **NBR**