

EN 175301 - 803 - A(DIN 43650)


A



A PRESSOSTATO


CONNETTORI CON CAVO COSTAMPATO
CONNECTORS WITH MOULDED CABLE
GERÄTESTECKER MIT ANGESPRITZTEM KABEL
con componenti elettronici/with electronics/beschaltet

Guarnizione integrata/Built-in gasket/Integrierte Dichtung
3P + 1 ⚡

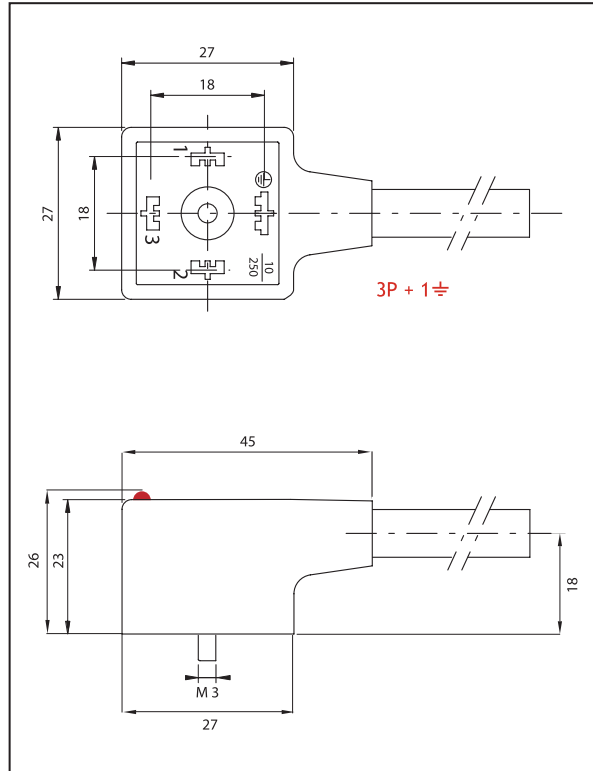


Corpo connettore Connector Stecker	TPV
Contatti Contact material Kontaktmaterial	CuZn (Ag)
Tensione nominale (max.) Max voltage Max.Spannung	Secondo circuito According to circuitry nach Beschaltung
Portata massima contatti Max. current Max. Strom	16 A
Portata nominale contatti: Operating current: Betriebsstrom:	10 A
Interasse Spacing: Abstand:	18 mm
Grado di protezione Protection class Schutzart	IP65 EN 60529 (DIN 40050)
Classe di isolamento Insulation class Isolierungsklasse	C - VDE 0110
Temperatura di funzionamento Working temperature Betriebstemperatur	-30°C / +125°C

Orientamento terra
Earth position
Erdrichtung




CODICI D'ORDINE vedi pag. 2
CODIFICATION see page 2
BESTELLSCHLÜSSEL siehe Seite 2

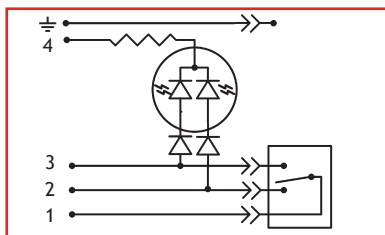

- ⚡ - Giallo-Verde/Yellow-Green/Gelber-Grün
- 4 - Blu/Blue/Blau
- 3 - Nero/Black/Schwarz
- 2 - Grigio/Gray/Grau
- 1 - Marrone/Brown/Brun

Codici ordine/Codification/Bestellschlüssel

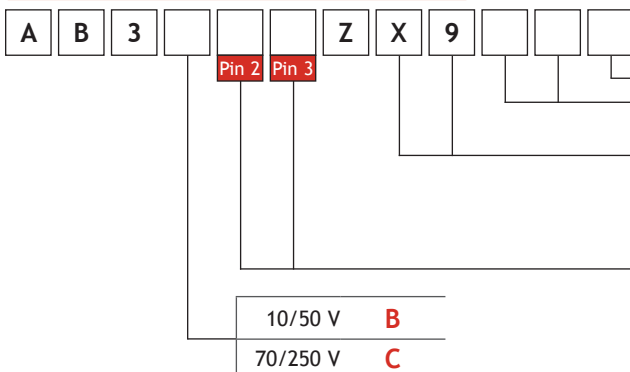

0 = H12 - 6 = H6

Lunghezza: dm/Lenght: dm/Länge: dm

FROR 5x0,75 mm²

Verde-Rosso/ Green-Red/Grün-Rot	ER
Rosso-Verde/ Red-Green/Rot-Grün	RE
Giallo-Verde/ Yellow-Green/Gelb-Grün	YE
Verde-Giallo/ Green-Yellow/Grün-Gelb	EY